


T2600C



- ✓ opening for easy die changes and for quick removal after splicing
- ✓ crimp die (TB7) is available for solid Cu conductors, type Excel or similar
- ✓ crimp force approx. 57 kN
- ✓ advanced force ratio for lowest handle force
- ✓ easy to work with in confined spaces
- ✓ quick feed function

Tested and certified mechanical hand-held tools for contact crimping Cu terminals, type KRT/KST 10-120 mm², Al terminals 16-25 mm² (-35 solid), and C-sleeves 6/6-25/25 mm².

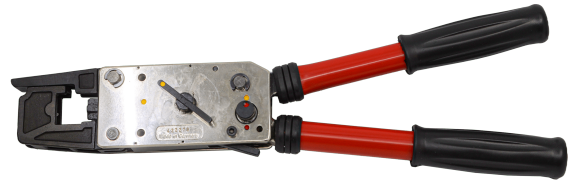

Item number: **5103-005300**

EAN: **7393487000063**

Crimp geometries: **Punch, Hexagonal, Oval**

AWG/MCM Cu: **8 - 4/0 AWG**

mm² Solid Al: **35**

mm² Cu: **10-120**

mm² KRT/KST: **10-120**

Matching items

Product	mm ² KR/KS, KRF/KSF	mm ² KRT/KST	mm ² KRD/KSD
TB7-19	—	10 / 120	120
TB8,5-18	—	16 / 95	—
TB8-18	10	10 / 95	—
TB10-16	—	25 / 70	95
TB12-14	—	35 / 50	50 / 70
TBC5-C6	—	—	—
TBNP16-20	—	—	—