


Aluminium terminals 16 - 1200 mm²

AK70-8

- ✓ Used for connecting Al conductors to Al busbar.
- ✓ Two crimps are needed.

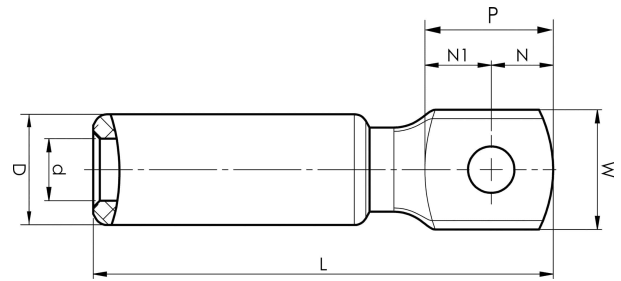

Al terminal for stranded Al cable 70 mm², or for solid Al cable 95 mm² with an M8 hole in the palm.
Used with Elpress certified systems V1300 or V250.



Item number: **7311-401700**
EAN: **7393487019829**

W (mm): **22**
N (mm): **11**
N1 (mm): **14**
P (mm): **25**
d (mm): **11.3**
D (mm): **20**
L (mm): **85**
t (mm) - palm thickness: **7.5**
s (mm) - strip length: **45**

Screw: **M8**

AWG/MCM Stranded Al: **2/0 AWG**
AWG/MCM Solid Al: **3/0 AWG**
mm² Stranded Al: **70**
mm² Solid Al: **95**