


Through connectors with aluminium partitions with different areas 16 - 400 mm<sup>2</sup>

# AS240-120

Al through connector with partition for stranded Al cable 240-120 mm<sup>2</sup>, or for solid Al cable -150 mm<sup>2</sup>.  
Used for splicing Al conductors of different areas.  
Used with Elpress certified systems V1300, V250.

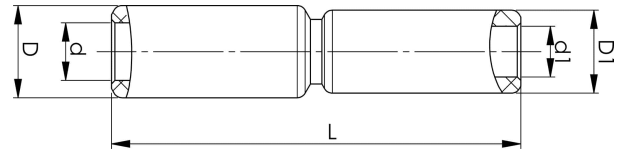

Item number: **7313-408400**

EAN: **7393487009189**

s1 (mm): **60**

d (mm): **19.8**

D (mm): **32**

L (mm): **132**

d1 (mm): **14**

D1 (mm): **25**

s (mm) - strip length: **61**

AWG/MCM Stranded Al: **4/0 AWG - 500 MCM**

AWG/MCM Solid Al: **300 MCM**

mm<sup>2</sup> Stranded Al: **240-120**

mm<sup>2</sup> Solid Al: **150**