


# AKS300SOLID- 300



- ✓ Connector from Al conductor to Cu conductor.
- ✓ Stranded/solid Al conductors, stranded/multi-stranded Cu conductors.
- ✓ For multi-stranded Cu conductors, contact crimping using the Dual system is recommended.
- ✓ Two crimps are required for Al, normally one for Cu.

AlCu through connector, from Al conductor to Cu conductor. For solid Al cable 300 mm<sup>2</sup> to the stranded/multi-stranded Cu cable 300 mm<sup>2</sup>. When crimping the Cu section, place the dies between the mark on the sleeve and the edge of the Cu section. Used with Elpress certified system V250.

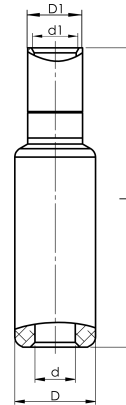

Item number: **7333-444600**  
EAN: **7393487089884**

s1 (mm): **30**  
d (mm): **20**  
D (mm): **36**  
L (mm): **124**  
d1 (mm): **26**  
D1 (mm): **32**  
s (mm) - strip length: **83**

AWG/MCM Solid Al: **600**  
AWG/MCM Cu: **550 MCM**  
mm<sup>2</sup> Solid Al: **300**  
mm<sup>2</sup> Cu: **300**