


Aluminium-copper through connectors 16 - 500  
mm<sup>2</sup>

# AKS35-16

✓ v

AlCu through connector, from Al conductor to Cu conductor. For stranded Al cable 35 mm<sup>2</sup>, or for solid Al cable 50 mm<sup>2</sup>, to stranded/multi-stranded Cu cable 16 mm<sup>2</sup>. When crimping the Cu section, place the dies between the mark on the sleeve and the edge of the Cu section. Used with Elpress certified systems V1300, V250.

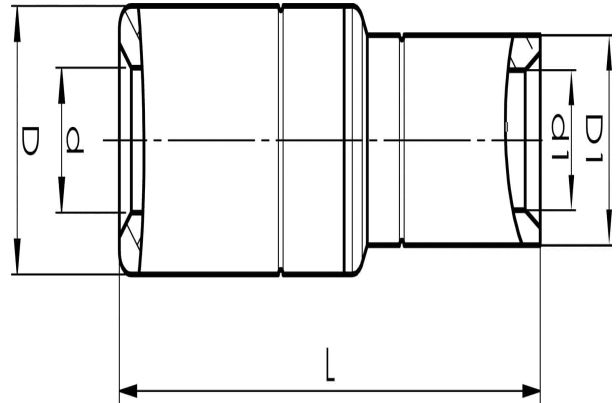

Item number: **7333-400300**  
EAN: **7393487009707**

s1 (mm): **15**  
d (mm): **8.5**  
D (mm): **20**  
L (mm): **66**  
d1 (mm): **6**  
D1 (mm): **9**  
s (mm) - strip length: **45**

AWG/MCM Stranded Al: **2 AWG**  
AWG/MCM Solid Al: **10 AWG**  
AWG/MCM Cu: **6 AWG**  
mm<sup>2</sup> Stranded Al: **35**  
mm<sup>2</sup> Solid Al: **50**  
mm<sup>2</sup> Cu: **16**  
Screen conductor (mm<sup>2</sup>): **15**