


Aluminium-copper through connectors 16 - 500  
mm<sup>2</sup>

# AKS400- 300A

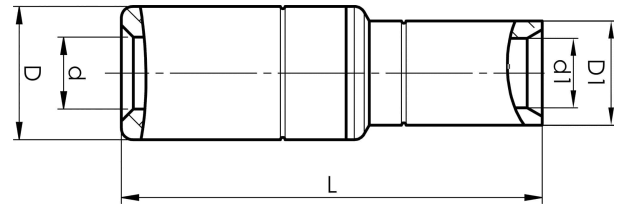

- ✓ Connector from Al conductor to Cu conductor.
- ✓ Stranded/solid Al conductors, stranded/multi-stranded Cu conductors.
- ✓ For multi-stranded Cu conductors, contact crimping using the Dual system is recommended.
- ✓ Two crimps are required for Al, normally one for Cu.

AlCu through connector, from Al conductor to Cu conductor. For stranded Al cable 400 mm<sup>2</sup> to stranded/multi-stranded Cu cable 300 mm<sup>2</sup>. When crimping the Cu section, place the dies between the mark on the sleeve and the edge of the Cu section. Used with Elpress certified system V250.



Item number: **7333-404000**  
EAN: **7393487010079**

s1 (mm): **30**  
d (mm): **25**  
D (mm): **40**  
L (mm): **125**  
d1 (mm): **24.5**  
D1 (mm): **31.5**  
s (mm) - strip length: **83**

AWG/MCM Stranded Al: **700 MCM**  
AWG/MCM Cu: **550 MCM**  
mm<sup>2</sup> Stranded Al: **400**  
mm<sup>2</sup> Cu: **300**