

Aluminium-copper through connectors 16 - 500  
mm<sup>2</sup>

# AKS400B- 240A

- ✓ Used for splicing Al conductors and Cu conductors
- ✓ Stranded/solid Al conductors, stranded/flexible Cu conductors.
- ✓ For multi-stranded Cu conductors, contact crimping using the Dual system is recommended.
- ✓ Two crimps are needed for Al.


AlCu through connector for stranded/solid Al cable 400 mm<sup>2</sup> to stranded/flexible Cu cable 240 mm<sup>2</sup>.  
When crimping the Cu section, place the dies between the mark on the sleeve and the edge of the Cu section. Used with Elpress certified systems V1300, V250.



Item number: **7333-448200**  
EAN: **7393487049147**

s1 (mm): **40**  
d (mm): **25**  
D (mm): **37**  
L (mm): **126.5**  
d1 (mm): **22.5**  
D1 (mm): **29**  
s (mm) - strip length: **68**

AWG/MCM Stranded Al: **700 MCM**  
AWG/MCM Cu: **450 MCM**  
mm<sup>2</sup> Stranded Al: **400**  
mm<sup>2</sup> Cu: **240**

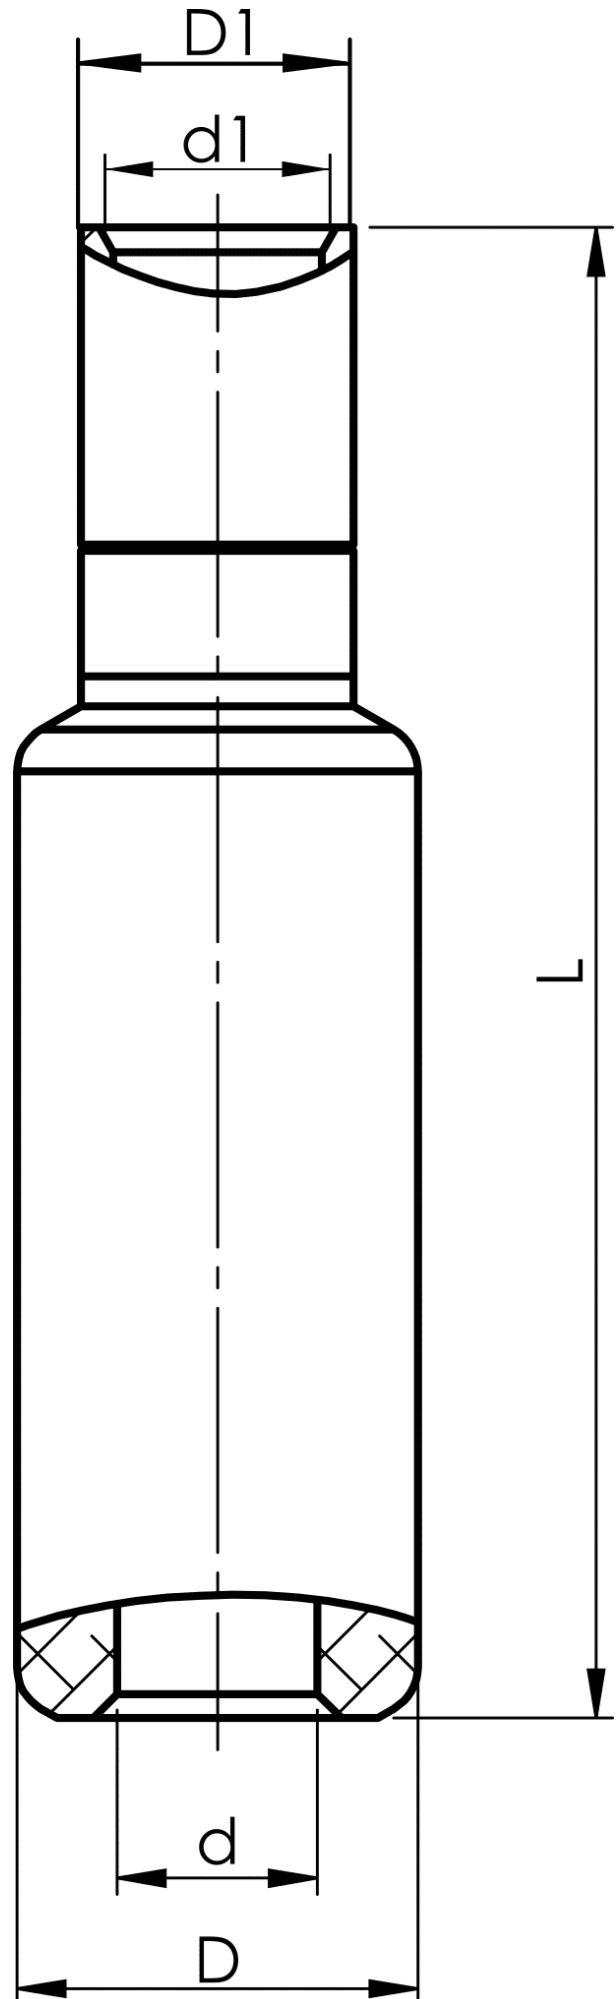

**ELPRESS**