

C-sleeves 6-300 mm²

C150-185

- ✓ Material: Cu 99.95%.
- ✓ Unique patented solution.
- ✓ Possible to front feed all branches.

Example of marking: 25-300/245-425 Area min-max /
Tot. area min-max

Elpress logotype BC18 Die pair BC18

Branching sleeve for splicing and branching earth
lines as well as lightning control installations. Used
with Elpress certified systems V250, V1470.





Item number: **7309-300900**
EAN: **7393487062917**

a (mm): **62.5**
b (mm): **40**
c (mm): **34.2**

Max voltage (kV): **1**

mm² C-sleeve Cu Range, Min: **240**
mm² C-sleeve Cu Range, Max: **425**
Side feed, Cu (mm²): **150/95-150, 185/70-185, 240/25-185, 300/25-120**
Front feed, Cu (mm²): **150/95-150, 185/70-185, 240/25-185, 300/25-120**
Side feed, Cu (AWG/MCM): **300MCM / 3/0-300MCM, 350MCM / 2/0-350MCM, 500MCM / #4-350MCM, 600MCM/#4-4/0**
Front feed, Cu (AWG/MCM): **300MCM / 3/0-300MCM, 350MCM / 2/0-350MCM, 500MCM / #4-350MCM, 600MCM/#4-4/0**

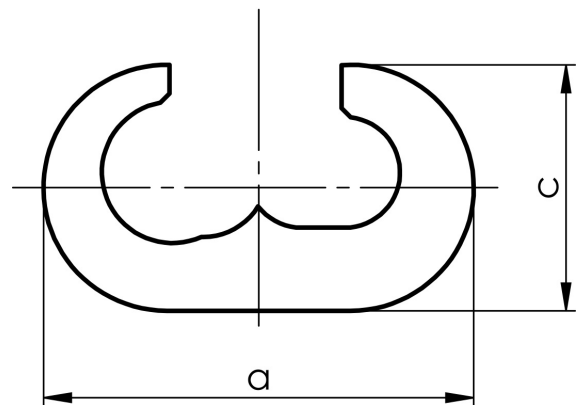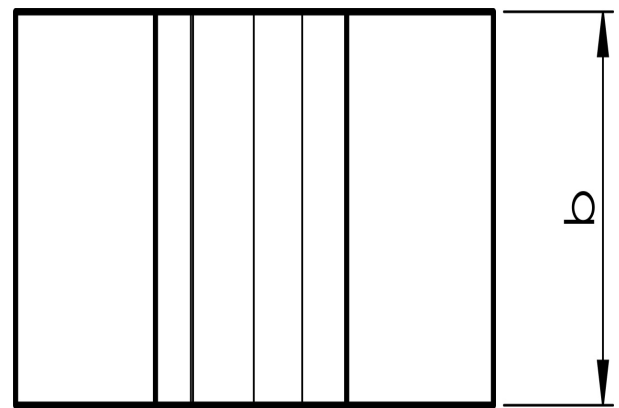

ELPRESS