


C-sleeves 6-300 mm<sup>2</sup>

# C50-70

- ✓ Material: Cu 99.95%, tin plated Cu/Sn.
- ✓ Unique patented solution.
- ✓ Possible to front feed all branches.

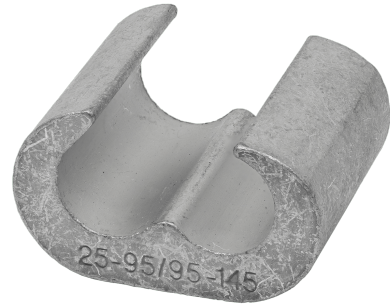

**Example of marking: 25-95/95-145** Area min-max /  
Tot. area min-max

**Elpress logotype BC13** Die pair BC13

Branching sleeve for splicing and branching earth lines as well as lightning control installations. Used with Elpress certified systems V1300, V250.



Item number: **7309-300600**

EAN: **7393487062337**

a (mm): **37**

b (mm): **30**

c (mm): **22**

mm<sup>2</sup> C-sleeve Cu Range, Min: **95**

mm<sup>2</sup> C-sleeve Cu Range, Max: **145**

Side feed, Cu (mm<sup>2</sup>): **50/50, 70/25-70, 95/25-50**

Front feed, Cu (mm<sup>2</sup>): **50/50, 70/25-70, 95/25-50**

Side feed, Cu (AWG/MCM): **1/0/1/0, 2/0/#4-2/0, 3/0/#4-1/0**

Front feed, Cu (AWG/MCM): **1/0/1/0, 2/0/#4-2/0, 3/0/#4-1/0**

