


T2600B



- ✓ opening for easy die changes and for quick removal after splicing
- ✓ crimp die (TB7) is available for solid Cu conductors, type Excel or similar
- ✓ crimp force approx. 57 kN
- ✓ advanced force ratio for lowest handle force
- ✓ easy to work with in confined spaces
- ✓ quick feed function

Tested and certified mechanical hand-held tools for contact crimping Cu terminals, type KRD/KSD 10-120 mm², Al terminals 16-25 mm² (-35 solid), and C-sleeves 6/6-25/25 mm².

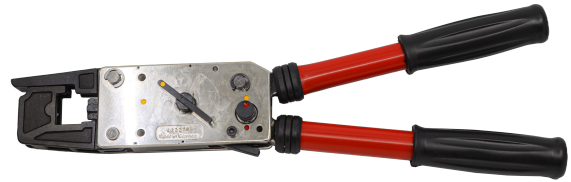

Item number: **5103-005200**

EAN: **7393487000056**

Delivery box: **Metal box**

Crimp geometries: **Punch, Hexagonal, Oval**

AWG/MCM Cu: **8 - 4/0 AWG**

mm² Solid Al: **35**

mm² Cu: **10-120**

Crimp range Cu-terminals min (mm²): **10**

Crimp range Cu-terminals max (mm²): **120**

Crimp range C-connectors min (mm²): **6/6**

Crimp range C-connectors max (mm²): **25/25**

Crimp range Al-terminals min (mm²): **16**

Crimp range Al-terminals max (mm²): **25**

Matching items

Product	mm ² KR/KS, KRF/KSF	mm ² KRT/KST	mm ² KRD/KSD
TB8-14	10	50	16 / 70
TB9-12	—	35	25 / 50
TB11-16	25	70	35 / 95
TBC5-C6	—	—	—
TBNP16-20	—	—	—