

C-sleeves 6-300 mm²

C95-120

- ✓ Material: Cu 99.95%.
- ✓ Unique patented solution.
- ✓ Possible to front feed all branches.

Example of marking: 25-185/175-240 Area min-max /
Tot. area min-max

Elpress logotype BC15 Die pair BC15

Branching sleeve for splicing and branching earth
lines as well as lightning control installations. Used
with Elpress certified systems V1300, V250.





Item number: **7309-300800**
EAN: **7393487062924**

a (mm): **45**
b (mm): **35**
c (mm): **25.6**

Max voltage (kV): **1**

mm² C-sleeve Cu Range, Min: **175**
mm² C-sleeve Cu Range, Max: **240**
Side feed, Cu (mm²): **95/95, 120/70-120, 150/25-70, 185/25-50**
Front feed, Cu (mm²): **95/95, 120/70-120, 150/25-70, 185/25-50**
Side feed, Cu (AWG/MCM): **3/0 / 3/0, 4/0 / 2/0-4/0, 300MCM/#4-2/0, 350MCM/#4-1/0**
Front feed, Cu (AWG/MCM): **3/0 / 3/0, 4/0 / 2/0-4/0, 300MCM/#4-2/0, 350MCM/#4-1/0**

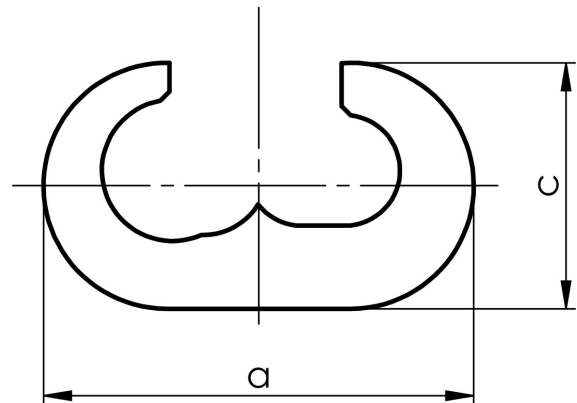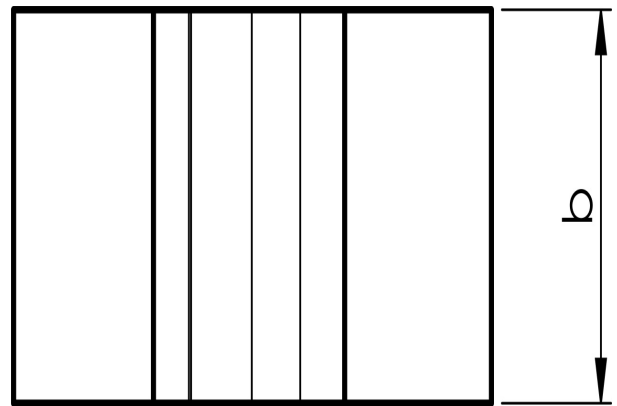

ELPRESS