

KRF tube terminals 16 - 800 mm²

KRF240A-10

- ✓ Material: Cu 99.95%, tin plated Cu/Sn.
- ✓ With inspection holes.
- ✓ For stranded (class 2), multi-stranded (class 5) and very flexible (class 6) Cu conductors according to IEC 60228, for multi-stranded Cu conductors contact crimping using the Dual system is recommended.

Example of marking KRF: 17 (neck) Elpress logotype 70 10F (palm)

17 = Die No. 70 = mm² 10 = palm hole for M10 F = type KRF for stranded, flexible and very flexible conductors.



**UK
CA**

Item number: **7301-145600**

EAN: **7393487032651**

W (mm): **42**

N (mm): **19**

N1 (mm): **20**

P (mm): **39**

f (mm): **1**

d (mm): **22.5**

D (mm): **30**

L (mm): **96**

t (mm) - palm thickness: **6.4**


s (mm) - strip length: **37**

Screw: **M10**

Inspection hole: **Yes**

AWG/MCM Cu: **450 MCM**

mm² Cu: **240**

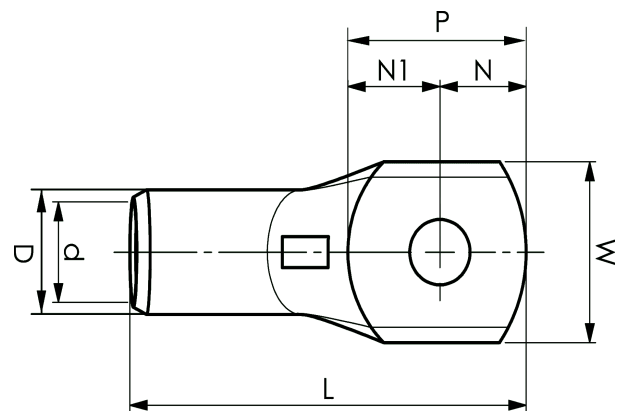

ELPRESS