


Aluminium terminals 16 - 1200 mm<sup>2</sup>

# AK35-10

- ✓ Used for connecting Al conductors to Al busbar.
- ✓ Two crimps are needed.

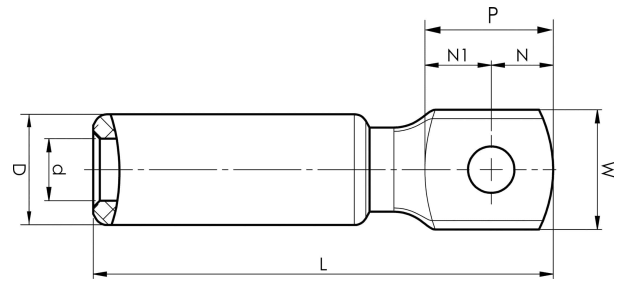

Al terminal for stranded Al cable 35 mm<sup>2</sup>, or for solid Al cable 50 mm<sup>2</sup> with an M10 hole in the palm. Used with Elpress certified systems V1300 or V250.



Item number: **7311-401100**  
EAN: **7393487017849**

W (mm): **22**  
N (mm): **11**  
N1 (mm): **14**  
P (mm): **25**  
d (mm): **8.5**  
D (mm): **20**  
L (mm): **85**  
t (mm) - palm thickness: **7.5**  
s (mm) - strip length: **45**

Screw: **M10**

AWG/MCM Stranded Al: **2 AWG**  
AWG/MCM Solid Al: **1/0 AWG**  
mm<sup>2</sup> Stranded Al: **35**  
mm<sup>2</sup> Solid Al: **50**