


KRF angled terminals 45°


# KRF25-8- 45GR

- ✓ Material: Cu 99.95%, tin plated Cu/Sn.
- ✓ Inspection hole
- ✓ For stranded (class 2) and multi-stranded (class 5) Cu conductors, for multi-stranded Cu conductors contact crimping using the Dual system is recommended.
- ✓ DNV approved.

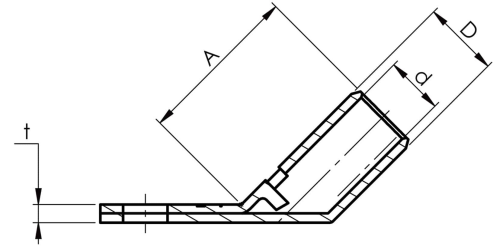

## Example of marking KRF: 17 (neck) Elpress logo 70 10F (palm)

17 = Die No. 70 = mm<sup>2</sup> 10 = palm hole for M10 F = type KRF for stranded and flexible conductors. Angled tube terminal 45° for multi-stranded (class 5) and stranded (class 2) Cu conductors (acc. to IEC 60228), 25 mm<sup>2</sup>, with an M8 hole in the palm. Used with Elpress certified systems V600, V1300, V250.

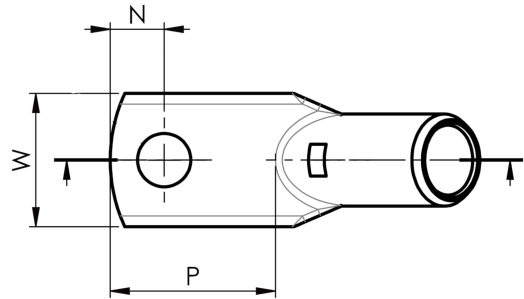

UK  
CA

Item number: **7301-125900**  
EAN: **7393487016132**

A (mm): **24**  
W (mm): **16**  
N (mm): **8.5**  
N1 (mm): **12**  
P (mm): **20.5**  
d (mm): **8**  
D (mm): **11**  
t (mm) - palm thickness: **2.7**  
s (mm) - strip length: **13**

Screw: **M8**  
Angle (°): **45**  
Inspection hole: **Yes**

AWG/MCM Cu: **4 AWG**  
mm<sup>2</sup> Cu: **25**

**ELPRESS**