

KRF angled terminals 90°, 10 - 185 mm²

KRF150-12- 90GR

- ✓ Material: Cu 99.95%, tin plated Cu/Sn.
- ✓ Inspection hole.
- ✓ For stranded (class 2) and multi-stranded (class 5) Cu conductors, for multi-stranded Cu conductors contact crimping using the Dual system is recommended.
- ✓ UL-approved, DNV approved.

Example of marking KRF: 17 (neck) Elpress logo 70 10F (palm)

17 = Die No. 70 = mm² 10 = palm hole for M10 F = type KRF for stranded and flexible conductors.
Angled tube terminal 90° for multi-stranded (class 5) and stranded (class 2) Cu conductors (acc. to IEC 60228), 150 mm², with an M12 hole in the palm.
Used with Elpress certified systems V600, V1300, V250.






Item number: **7301-548400**
EAN: **7393487089617**

A (mm): 47
W (mm): 36
N (mm): 12.5
N1 (mm): 19.5
P (mm): 32
d (mm): 19
D (mm): 25
t (mm) - palm thickness: 5.9
s (mm) - strip length: 32

Screw: **M12**
Angle (°): **90**
Inspection hole: **Yes**

AWG/MCM Cu: **300 MCM**
mm² Cu: **150**

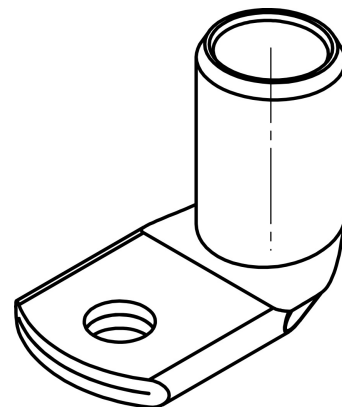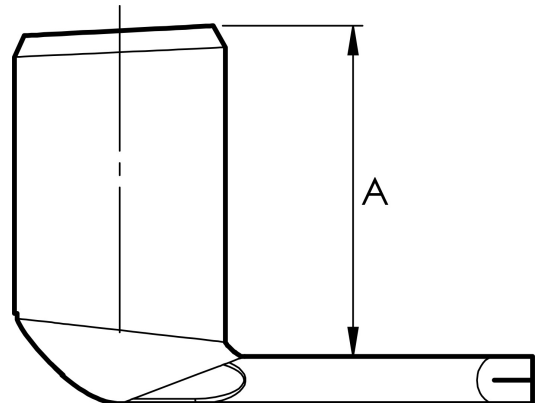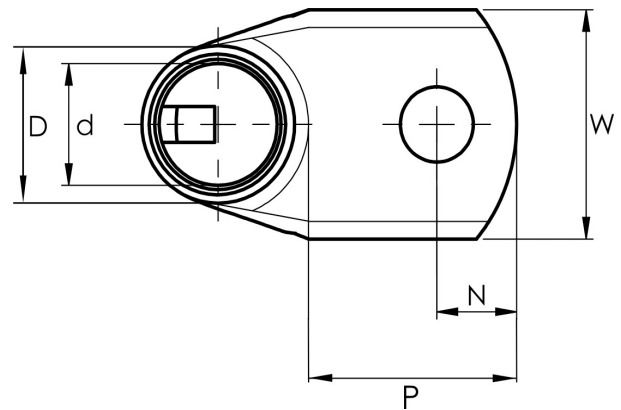

ELPRESS