KRF tube terminals (NS) - No inspection hole

KRF185-12NS

- Material: Cu 99.95%, tin plated Cu/Sn.
- No inspection holes.
- For stranded (class 2), multi-stranded (class 5) and very flexible (class 6) copper conductors according to IEC 60228, contact crimping with the DUAL system is recommended for class 5 and class 6 conductors.

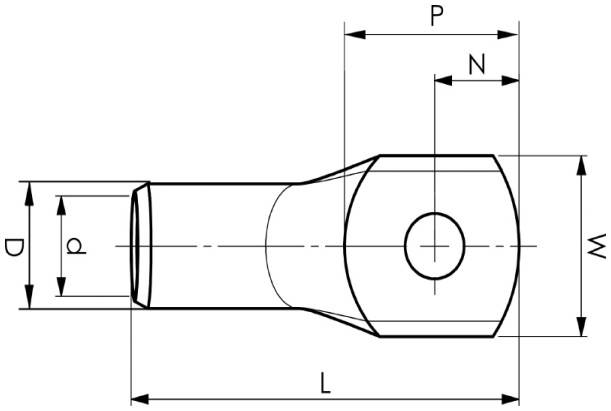

Item number: **7301-476400**
EAN: **7393487089792**

W (mm): **39**
N (mm): **15**
N1 (mm): **16**
P (mm): **31**
f (mm): **1**
d (mm): **21**
D (mm): **27**
L (mm): **86**
t (mm) - palm thickness: **5.9**
s (mm) - strip length: **37**

Screw: **M12**

AWG/MCM Cu: **350 MCM**
mm² Cu: **185**