Kaapelikiristimet

SE50-75

- Manufactured from polyamide (PA), glass fibre reinforced.
- Resistant to oils, UV, ozone, salt, moisture, acids and even nuclear radiation.
- UL94 self-extinguishing, Halogen-free.
- Temperature range from -40°C to 120°C.
- Mechanical resistance to short-circuits 12.000 N.
- Coloured black.

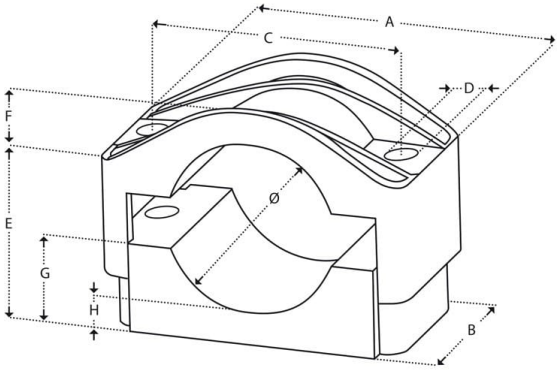

Tuotenumero: **8010-043100**
EAN: **7393487042483**
Snro: **5202613**

B (mm): **60**
A (mm): **126**
H (mm): **9**
D (mm): **12**
C (mm): **95**
F (mm): **22**
G (mm): **30**
E (mm): **46-71**
Cable ø: **50-75**