

C-sleeves 6-300 mm²

C240-300

- ✓ Material: Cu 99.95%.
- ✓ Unique patented solution.
- ✓ Possible to front feed all branches.

Example of marking: 150-300/450-540 Area min-max
/ Tot. area min-max

Elpress logotype BC21 Die pair BC21


Branching sleeve for splicing and branching earth lines as well as lightning control installations. Used with Elpress certified systems V250, V1470.



Item number: **7309-301000**
EAN: **7393487062931**

a (mm): **72**
b (mm): **50**
c (mm): **40.7**

mm² C-sleeve Cu Range, Min: **450**
mm² C-sleeve Cu Range, Max: **540**
Side feed, Cu (mm²): **300/240, 300/185, 300/150, 240/240**
Front feed, Cu (mm²): **300/240, 300/185, 300/150, 240/240**
Side feed, Cu (AWG/MCM): **600MCM/500MCM, 600MCM/350MCM, 600MCM/300MCM, 500MCM/500MCM**
Front feed, Cu (AWG/MCM): **600MCM/500MCM, 600MCM/350MCM, 600MCM/300MCM, 500MCM/500MCM**

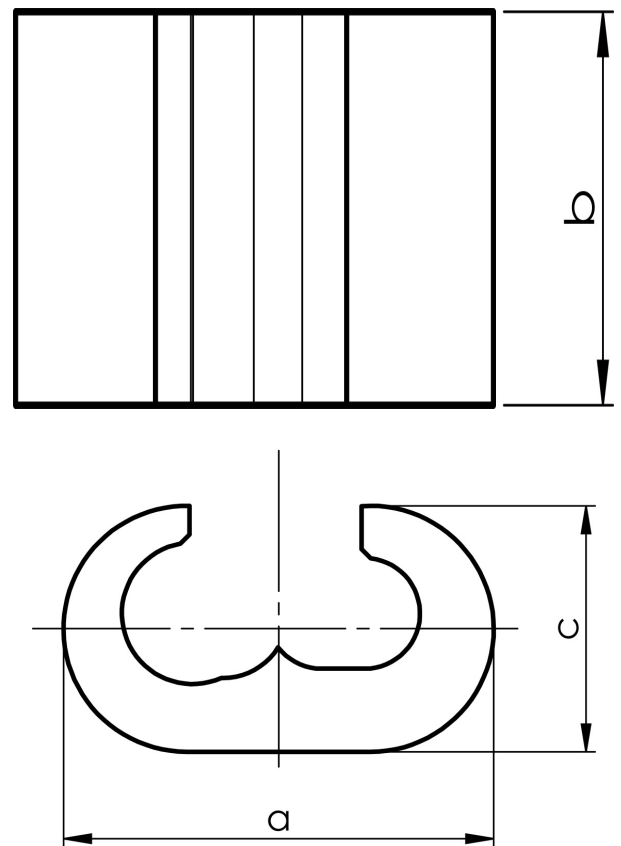

ELPRESS