

C-sleeves 6-300 mm<sup>2</sup>


# C25-50

- ✓ Material: Cu 99.95%, tin plated Cu/Sn.
- ✓ Unique patented solution.
- ✓ Possible to front feed all branches.

**Example of marking: 6-50/50-100** Area min-max /  
Tot area min-max

**Elpress logotype BC89** Die pair BC89

Branching sleeve for splicing and branching earth lines as well as lightning control installations. Used with Elpress certified systems V600, V1300, V250.

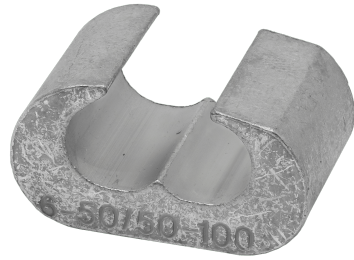

Item number: **7309-021100**  
EAN: **7393487037106**

a (mm): **30**  
b (mm): **19**  
c (mm): **16**

mm<sup>2</sup> C-sleeve Cu Range, Min: **50**  
mm<sup>2</sup> C-sleeve Cu Range, Max: **100**  
Side feed, Cu (mm<sup>2</sup>): **25-50/25-50, 16-50/35-50**  
Front feed, Cu (mm<sup>2</sup>): **16/35-50**  
Side feed, Cu (AWG/MCM): **#4-1/0 / #4-1/0, #6-1/0 / #2-1/0**  
Front feed, Cu (AWG/MCM): **#6/#2-1/0**

