


KRF tube terminals with two holes

# KRF70-12X2-40

- ✓ Material: Cu 99.95%, tin plated Cu/Sn.
- ✓ Inspection hole.
- ✓ For stranded (class 2) and multi-stranded (class 5) Cu conductors, for multi-stranded Cu conductors contact crimping using the Dual system is recommended.
- ✓ UL-approved, DNV approved.

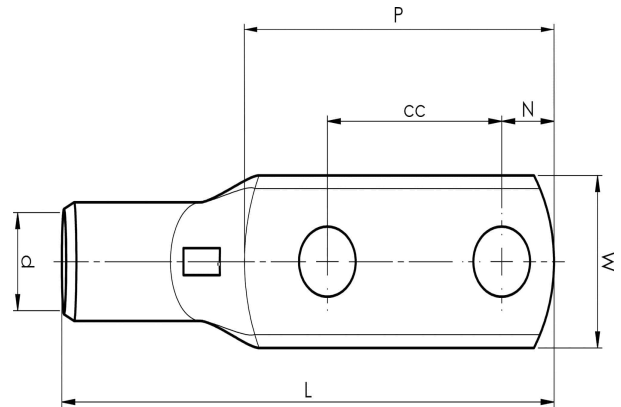

## Example of marking KRF: 17 (neck) Elpress logotype 70 10F (palm)

17 = Die No. 70 = mm<sup>2</sup> 10 = palm hole for M10 F = type KRF for stranded and flexible conductors.  
2 holed tube terminal for multi-stranded (class 5) and stranded (class 2) Cu-conductors (acc. to IEC 60228), 70 mm<sup>2</sup>, with two M12 holes in the palm.  
Used with Elpress certified systems V600, V1300 or V250.



UK  
CA

Item number: **7301-240100**

EAN: **7393487007291**

W (mm): **25**

N (mm): **12**

N1 (mm): **18**

P (mm): **70**

cc (mm): **40**

f (mm): **1**

d (mm): **13**

D (mm): **17**

L (mm): **103**

t (mm) - palm thickness: **3.9**

s (mm) - strip length: **22**

Screw: **M12x2**

Inspection hole: **Yes**

AWG/MCM Cu: **2/0 AWG**

mm<sup>2</sup> Cu: **70**

**ELPRESS**