


T2600



- ✓ opening for easy die changes and for quick removal after splicing
- ✓ crimp die (TB7) is available for solid Cu conductors, type Excel or similar
- ✓ crimp force approx. 57 kN
- ✓ advanced force ratio for lowest handle force
- ✓ easy to work with in confined spaces
- ✓ quick feed function

Tested and certified mechanical hand-held tools for contact crimping Cu terminals, type KRF/KSF 10-95 mm², Al terminals 16-25 mm² (-35 solid), and C-sleeves 6/6-25/25 mm².

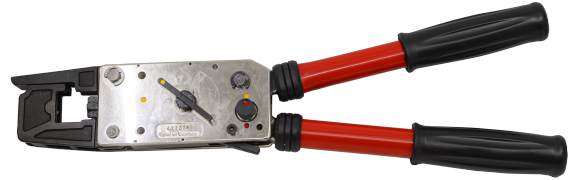

Item number: **5103-009200**

EAN: **7393487000049**

Fast forward function: **Yes**

Delivery box: **Metal box**

Crimp geometries: **Punch, Hexagonal, Oval**

AWG/MCM Stranded Al: **6 - 4 AWG**

AWG/MCM Solid Al: **6 - 2 AWG**

AWG/MCM Cu: **10 - 6 AWG**

mm² Stranded Al: **16-25**

mm² Solid Al: **16-35**

mm² Cu: **10-95**

Crimp range Cu-terminals min (mm²): **10**

Crimp range Cu-terminals max (mm²): **95**

Crimp range C-connectors min (mm²): **6/6**

Crimp range C-connectors max (mm²): **25/25**

Crimp range Al-terminals min (mm²): **16**

Crimp range Al-terminals max (mm²): **25**

Matching items

Product	mm ² KR/KS, KRF/KSF	mm ² KRT/KST	mm ² KR D/KSD
TB7-20	10 / 95	10	—
TB8-17	10 / 70	—	16
TB9-13	16 / 35	—	25

Product	mm² KR/KS, KRF/KSF	mm² KRT/KST	mm² KRD/KSD
TB11-14,5	25 / 50	—	—
TB14,5-17	—	—	—
TBC5-C6	—	—	—
TBKA9-11,5	10-16	—	—
TBNP16-20	—	—	—