


Through connectors with aluminium partitions with different areas 16 - 400 mm²

AS95-25

Al through connector with partition for stranded Al cable 95-25 mm², or for solid Al cable 120-35 mm².
Used for splicing Al conductors of different areas.
Used with Elpress certified systems V1300, V250.

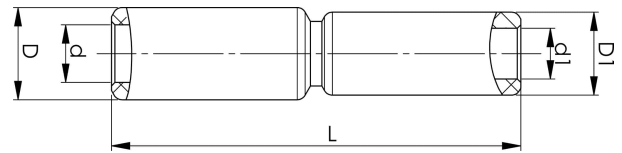

Item number: **7313-442600**

EAN: **7393487015852**

s1 (mm): **29**

d (mm): **12.5**

D (mm): **25**

L (mm): **101.1**

d1 (mm): **6.8**

D1 (mm): **13**

s (mm) - strip length: **60**

AWG/MCM Stranded Al: **4 - 3/0 AWG**

AWG/MCM Solid Al: **2250**

mm² Stranded Al: **95-25**

mm² Solid Al: **120-35**