KRF tube terminals 16 - 800 mm²

KRF35-14

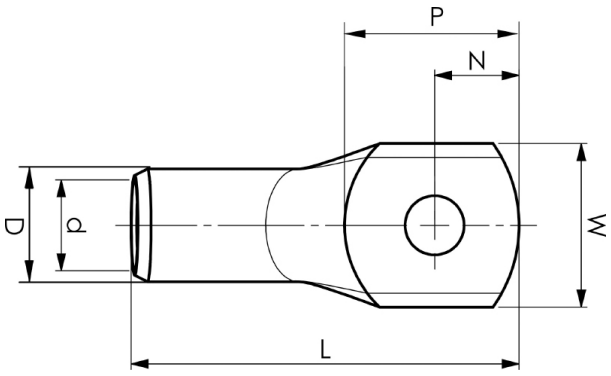

- Material: Cu 99.95%, tin plated Cu/Sn.
- With inspection holes.
- For stranded (class 2), multi-stranded (class 5) and very flexible (class 6) Cu conductors according to IEC 60228, for multi-stranded Cu conductors contact crimping using the Dual system is recommended.

Example of marking KRF: 17 (neck) Elpress logotype 70 10F (palm)
17 = Die No. 70 = mm² 10 = palm hole for M10 F = type KRF for stranded, flexible and very flexible conductors.

Item number: **7301-509000**
EAN: **7393487041370**

W (mm): **25**
N (mm): **15**
N1 (mm): **16**
P (mm): **31**
d (mm): **9**
D (mm): **13**
L (mm): **57**
t (mm) - palm thickness: **2.9**
s (mm) - strip length: **16**

Screw: **M14**
Inspection hole: **Yes**

AWG/MCM Cu: **2 AWG**
mm² Cu: **35**