

KRFS tube terminals 50 - 400 mm² with narrow palm

KRFS150-6


- ✓ Material: Cu 99.95%, tin plated Cu/Sn.
- ✓ Inspection hole
- ✓ For stranded (class 2) and multi-stranded (class 5) Cu conductors, for multi-stranded Cu conductors contact crimping using the Dual system is recommended.
- ✓ Easy to install via cable gland, allows for pre-installation.
- ✓ The width of the palm is less than or as wide as the neck.

Example of marking KRFS: 17 (neck) Elpress logotype 70 10F (palm)

17 = Die no. 70 = mm² 10 = palm hole for M10 F = type KRF for stranded and flexible conductors.
Tube terminal with narrow palm for multi-stranded (class 5) and stranded (class 2) Cu conductors (acc. to IEC 60228), 150 mm², with an M6 hole in the palm. Used with Elpress certified systems V600, V1300, V250.



UK
CA

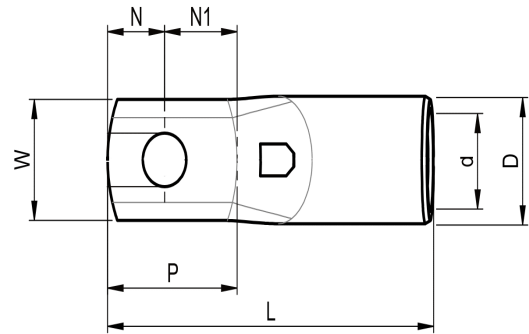

Item number: **7301-291600**

EAN: **7393487062078**

W (mm): **25**

N (mm): **11**

N1 (mm): **14**

P (mm): **25**

f (mm): **1**

d (mm): **19**

D (mm): **25**

L (mm): **74**

t (mm) - palm thickness: **6.3**

s (mm) - strip length: **32**

Screw: **M6**

Inspection hole: **Yes**

AWG/MCM Cu: **300 MCM**

mm² Cu: **150**

ELPRESS