




# ELPRESS®

## Product Datasheet

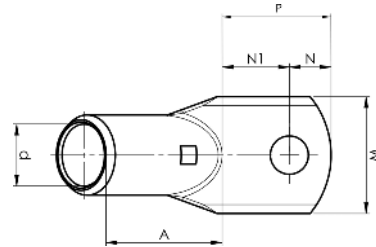

### Tube terminals (L) 45°, 25 - 400 mm<sup>2</sup>

mm <sup>2</sup> (Cu)	AWG Cu	Winding mm <sup>2</sup>	Name	Screw	W (mm)	d	D	N	N1	P	A	t	s	Die	Pcs/ pack	Tool
25	4	30-47	KRF25-10L-45GR	M10	17	8	11	11,5	13,7	25,2	23	2,9	13	11L	100	V600, V1300
25	4	30-47	KRF25-8L-45GR	M8	16	8	11	8,5	12,2	20,7	23	2,9	13	11L	50	V600, V1300
35		45-70	KRF35-8L-45GR	M8	18	9	13	8,5	12	20,5	30	3,9	16	13L	100	V600, V1300
35		45-70	KRF35-10L-45GR	M10	18	9	13	11,5	13,5	25	30	3,9	16	13L	100	V600, V1300
35		45-70	KRF35-12L-45GR	M12	19	9	13	12,5	17,5	30	30	3,7	16	13L	100	V600, V1300
50		69-103	KRF50-8L-45GR	M8	21	11	14,5	8,5	17,5	26	31	3,4	19	14,5L	100	V600, V1300
50		69-103	KRF50-10L-45GR	M10	21	11	14,5	11,5	18,5	30	31	3,4	19	14,5L	100	V600, V1300
50		69-103	KRF50-12L-45GR	M12	21	11	14,5	12,5	19,5	32	31	3,4	19	14,5L	100	V600, V1300
70		100-120	KRF70-10L-45GR	M10	25	13	17	11,5	18,5	30	35	3,9	22	17L	50	V600, V1300
70		100-120	KRF70-12L-45GR	M12	24	13	17	12,5	19,5	32	35	3,9	22	17L	50	V600, V1300
95		113-161	KRF95-10L-45GR	M10	28	15	20	11,5	18,5	30	40	4,9	25	20L	50	V600, V1300
95		113-161	KRF95-12L-45GR	M12	29	15	20	12,5	19,5	32	40	4,9	25	20L	50	V600, V1300
120		145-185	KRF120-10L-45GR	M10	32	17	22	11,5	18,5	30	43	4,9	27	22L	25	V600, V1300
120		145-185	KRF120-12L-45GR	M12	32	17	22	12,5	19,5	32	43	4,9	27	22L	25	V600, V1300
150		180-220	KRF150-12L-45GR	M12	36	19	25	12,5	19,5	32	49	5,9	32	25L	25	V1300, V250
150		180-220	KRF150-10L-45GR	M10	36	19	25	11,5	18,5	30	49	5,9	32	25L	25	V1300, V250
185		220-265	KRF185-12L-45GR	M12	39	21	27	12,5	19,5	32	55	5,8	37	27L	20	V1300, V250
185		220-265	KRF185-10L-45GR	M10	39	21	27	11,5	18,5	30	55	5,8	37	27L	20	V1300, V250
240		302-343	KRF240-12L-45GR	M12	44	24	30	12,5	19,5	32	57	5,8	37	30L	10	V1300, V250
240		302-343	KRF240-10L-45GR	M10	44	24	30	11,5	18,5	30	57	5,8	37	30L	10	V1300, V250
300		340-400	KRF300-12L-45GR	M12	46	24,5	31,5	22	18	40	61	6,8	44	32L	10	V250
300		340-400	KRF300-16L-45GR	M16	46	24,5	31,5	22	18	40	61	6,8	44	32L	10	V250
400		412-500	KRF400-12L-45GR	M12	56	30	38	22	18	40	75	7,8	52	38L	8	V250

t = palm thickness, s = strip length



# ELPRESS®